

## TECHNICAL DATA

Power Supply	24 V DC or 230 V AC
Power Consumption	4,6 VA
Electronics Type	H – HEAD
Design Options	Compact ( $T_{max}$ 90 °C), Remote
Nominal Diameter	DN 80 ... DN 600
Lining Material	Hard rubber
Electrode Material	AISI 316Ti (stainless steel)
Construction	All-welded
Measuring Principle	Electromagnetic in combination with ultrasonic level meter
Application	Open channels, gravity-fed systems, partially filled pipelines, grey waters, rain waters
Pipe Pressure Ratings	No pressure (gravity flow) or PN10 if pipe is full
Measuring Medium	Conductive liquids (e.g., wastewater, surface water, treated water)
Flowmeter Accuracy	$\pm 2-3$ % of actual flow (depends on flow profile and level detection)
Additional Electrodes	Grounding
Empty-pipe Detection	DN 80 ... DN 600
Display	LCD 2 x 16 characters, local display with totalizer, instantaneous flow, level info, status info
Controls	2x external buttons (for value viewing) 3x internal buttons (for viewing and parameter setting)
Outputs	2x pulse / flow switch (max. 400 Hz), 4 ... 20 mA, 1x RS485 interface (Modbus / M-Bus protocol), M-Bus, HART, micro SD, Ethernet module (TCP/IP, integrated web server), NB-IoT
Ambient Temperature	max to 55 °C
Ingress Protection	IP68 for sensor, IP65-IP68 for transmitter
Ingress Electronics Protection	standard design (H – Head)
Installation	In open channel, waste line, rainwater lines - no pressure systems
Level Detection	Integrated ultrasonic sensor
Process Temperature	0 °C to +55 °C

## FLOW RANGES

DN	Flow rate m <sup>3</sup> /hod		Flow cross-section area cm <sup>2</sup>		Velocity m/s	
	Pipe filling		Pipe filling		$v_{min}$ *	$v_{max}$ **
mm	10 %	70 %	10 %	70 %	m/s	m/s
80	1	25	4,7	35,3	0,46	1,95
100	2	45	8,1	55	0,55	2,3
150	5	132	18,3	124	0,72	3
200	10	290	32,4	220	0,88	3,6
250	19	512	51	341	1,02	4,2
300	30	840	73	495	1,15	4,7
400	59	1 820	121	883	1,35	5,7
500	118	3 250	202	1 365	1,61	6,6
600	171	5 360	270	1 990	1,76	7,5

$v_{min}$ \* for 10 % pipe filling and 1 % slope |  $v_{max}$ \*\* for 70 % pipe filling and 4 % slope

## DIMENSIONAL TABLE

Connection [mm]	Installation length [mm]	Total height [mm]	
		Compact version	Remote version
	Flanged	Flanged	Flanged
DN	L1	H1	H3
80	200	273	236
100	250	286	249
150	300	314	277
200	350	344	307
250	450	387	350
300	500	412	375
400	600	472	435
500	600	952	907
600	600	1085	1040

Note: the outer diameter of the flange corresponds to the required pressure class and standard




**COMAC CAL s.r.o.**

Czech Republic, 735 42 Těrlíčko  
phone: +420 608 810 032  
e-mail: info@comacal.com  
www.comacal.com



## PRODUCT ORDERING CODE

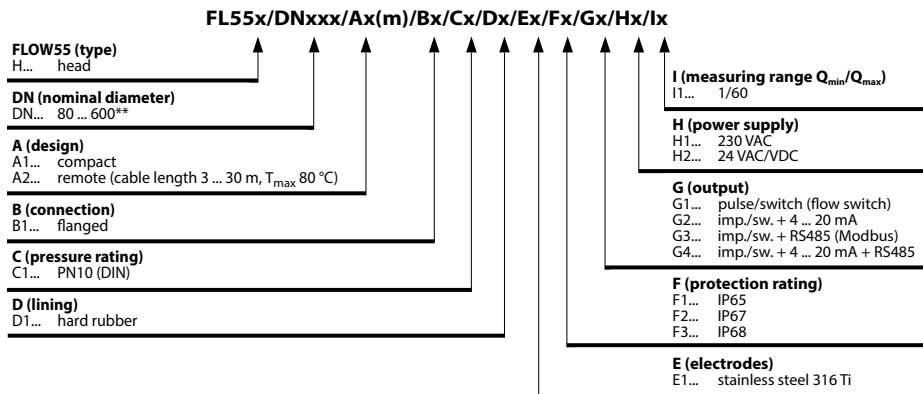

## ACCESSORIES:

### STANDALONE MODULES:


- (CANNOT BE COMBINED)
- Additional analog output 4 ... 20 mA
  - Ethernet module (Modbus TCP/IP protocol)
  - Ethernet module (integrated web server)
  - NB-IoT module

### COMBINABLE MODULES:

- M-bus (available separately or combined with micro SD card)
- HART (available separately or combined with micro SD card)
- micro SD card (available separately)

# FLOW 55

## FLANGED CONNECTION (EN 1092)

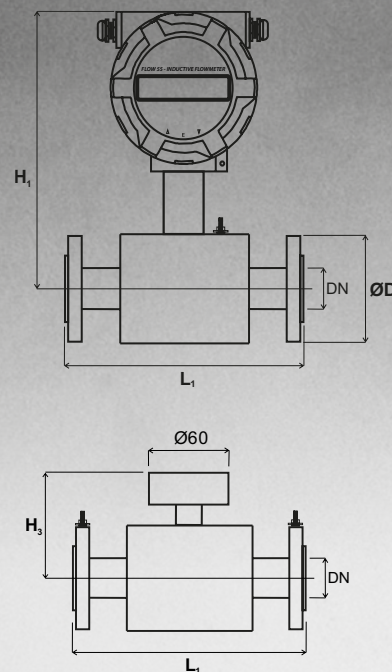

The installation lengths can be adjusted by agreement with the manufacturer.